

SCB AIR & DIRT SEPARATORS WITH FLANGE


Air and dirt separators Heating, solar and cooling systems

- Designed to eliminate dirt particles in heating systems with minimum load losses
- AUTO operation
- Steel body and stainless steel internal reflectors for air bubbles removal
- High performance brass top air vent (1/2" connection)
- Discharge fitting 1" (GF) with bottom cap
- Red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



Technical specifications

- | | |
|--------------------------|-----------|
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Water connection: | see below |

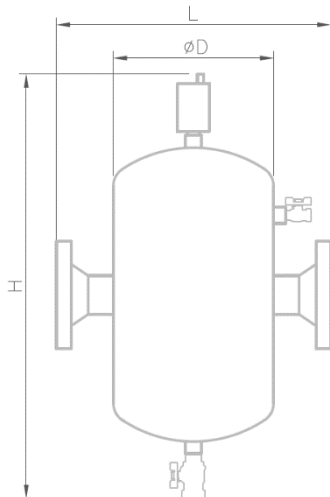

Weight (Kg)	Code	Model	Connection	L (mm)	ØD (mm)	H (mm)
20	18200050B	SCB-50	DN50 PN16	350	168	770
21	18200065B	SCB-65	DN65 PN16	350	168	770
36	18200080B	SCB-80	DN80 PN16	470	270	755
38	18200100B	SCB-100	DN100 PN16	470	270	755
73	18200125B	SCB-125	DN125 PN16	635	360	970
78	18200150B	SCB-150	DN150 PN16	635	360	970
135	18200200B	SCB-200	DN200 PN16	780	400	1.100
241	18200250B	SCB-250	DN250 PN16	880	485	1.405
282	18200300B	SCB-300	DN300 PN16	1.005	600	1.575