

SCS AIR & DIRT SEPARATORS WITHOUT FLANGE


Air and dirt separators Heating, solar and cooling systems

- Designed to eliminate dirt particles in heating systems with minimum load losses
- AUTO operation
- Steel body and stainless steel internal reflectors for air bubbles removal
- High performance brass top air vent (1/2" connection)
- Discharge fitting 1" (GF) with bottom cap
- Red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



Technical specifications

- | | |
|--------------------------|-----------|
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Water connection: | see below |

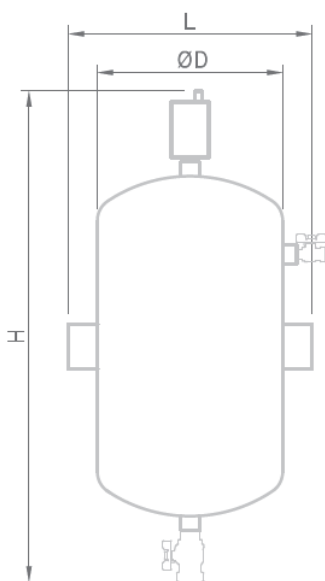

Weight (Kg)	Code	Model	Connection	L (mm)	ØD (mm)	H (mm)
15	18200050S	SCS-50	DN50 PN16	335	168	770
16	18200065S	SCS-65	DN65 PN16	335	168	770
28	18200080S	SCS-80	DN80 PN16	370	270	755
29	18200100S	SCS-100	DN100 PN16	370	270	755
60	18200125S	SCS-125	DN125 PN16	525	360	970
62	18200150S	SCS-150	DN150 PN16	525	360	970
112	18200200S	SCS-200	DN200 PN16	650	400	1.100
208	18200250S	SCS-250	DN250 PN16	750	485	1.405
238	18200300S	SCS-300	DN300 PN16	850	600	1.575