
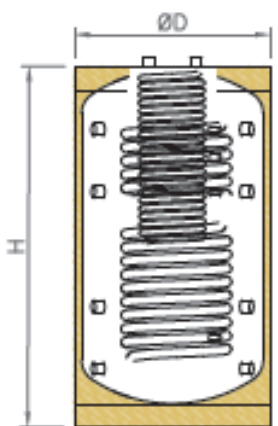
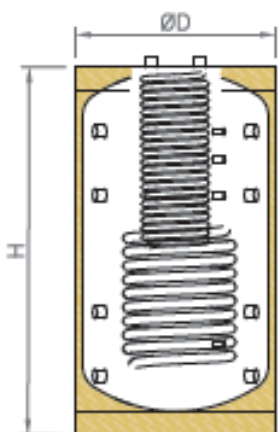


ACES

Combined puffer tanks for hot sanitary water and heating Solar and heating systems

- Puffer tanks designed for combined systems to store heating water and hot sanitary water.
- Steel accumulators without internal treatment.
- Replaceable stainless steel coil to contain ACS.
- Upper flange DN400.
- Thermal insulation in polyurethane foam with minimum thickness of 50 mm and PVC jacket in grey colour.
- Sleeves are protected with trims and caps
- Designed and manufactured according to 2014/68/UE Directive.

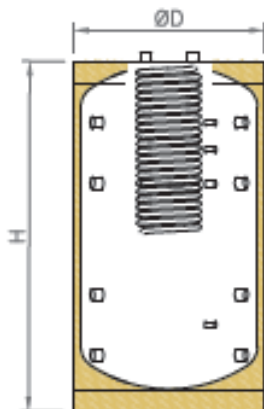

Technical specifications

- Volume: 500 – 1.500 Liters
- Max. service pressure (Puffer): 6 Bar
- Max. service pressure (coil): 10 Bar
- Temperature max.: 100°C
- Temperature min.: 0°C
- Auxiliar connection: R - GH see below
- Water connection: R - GH see below

Code	Model	Volume (Liters)	Weight (Kg)	ØD (mm)	H (mm)	Exchange Surface HSW coil (m ²)	Exchange Surface bottom coil (m ²)	Exchange Surface upper coil (m ²)
16950000	500 ACES-0	500	155	700	1.950	3,8	-	-
16975000	750 ACES-0	750	236	950	1.850	3,8	-	-
16910000	1000 ACES-0	1.000	295	950	2.320	5	-	-
16912500	1250 ACES-0	1.250	395	1.160	2.050	5	-	-
16915000	1500 ACES-0	1.500	425	1.160	2.375	8,3	-	-
16950001	500 ACES-1	500	205	700	1.950	3,8	2	-
16975001	750 ACES-1	750	290	950	1.850	3,8	2,5	-
16910001	1000 ACES-1	1.000	345	950	2.320	5	3,2	-
16912501	1250 ACES-1	1.250	445	1.160	2.050	5	3,2	-
16915001	1500 ACES-1	1.500	475	1.160	2.375	8,3	4,3	-
16950002	500 ACES-2	500	240	700	1.950	3,8	2	1,3
16975002	750 ACES-2	750	325	950	1.850	3,8	2,5	1,4
16910002	1000 ACES-2	1.000	380	950	2.320	5	3,2	2
16912502	1250 ACES-2	1.250	480	1.160	2.050	5	3,2	2,1
16915002	1500 ACES-2	1.500	505	1.160	2.375	8,3	4,3	2,1