

## AMR M/F




### Hydropneumatic tanks with bladder Booster sets

- Hydropneumatic tanks specially designed for booster sets
- Material: Steel
- Replaceable bladder according to EN 13831, suitable for drinking water
- Galvanized water connection (R 1 ¼" – R 1 ½")
- Models: 100 AMR-P-A A 700 AMR-B upper coupling with threaded connection (3/4" G.M. – ½" G.H.)
- Precharge valve
- Gas (precharge): Air
- External red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



#### Technical specifications

- |                          |                  |
|--------------------------|------------------|
| ▪ Volume:                | 100 – 700 Liters |
| ▪ Bladder:               | Replaceable      |
| ▪ Max. service pressure: | 8-10 Bar         |
| ▪ Test pressure:         | 12-15 Bar        |
| ▪ Precharge EXWORKS:     | 1,5 Bar          |
| ▪ Temperature max.:      | 100°C            |
| ▪ Temperature mín.:      | -10°C            |
| ▪ Water connection:      | R 1¼" – 1½" G.M  |

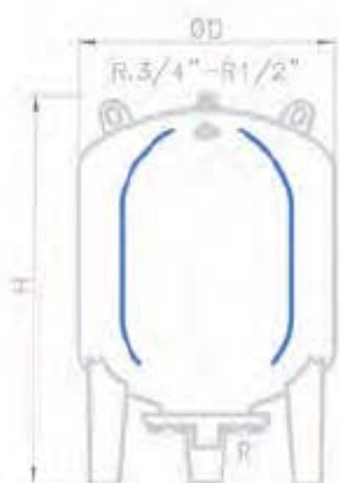

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
18	03100041	100 AMR-P-A	100	10	450	875	1 ¼"
25	03150801	150 AMR-B90	150	10	485	1.060	1 ¼"
42	03200801	200 AMR-B90	200	10	550	1.135	1 ¼"
55	03300801	300 AMR-B160	300	10	650	1.180	1 ¼"
71	03500801	500 AMR-B160	500	10	750	1.450	1 ½"
78	03700501	700 AMR-B160	700	8	750	1.750	1 ½"