

AMR WITHOUT FEET HIGH PRESSURES




Hydropneumatic tanks with bladder Booster sets

- Hydropneumatic tanks specially designed for booster sets
- Material: Steel
- Replaceable bladder according to EN 13831, suitable for drinking water
- Galvanized water connection (R 1")
- Precharge valve
- Gas precharge: Air
- External red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



Technical specifications

- | | |
|--------------------------|----------------|
| ▪ Volume: | 15 – 50 Liters |
| ▪ Bladder: | Replaceable |
| ▪ Max. service pressure: | 16 Bar |
| ▪ Test pressure: | 24 Bar |
| ▪ Precharge EXWORKS: | 1,5 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature min.: | -10°C |
| ▪ Water connection: | R 1" G.M |

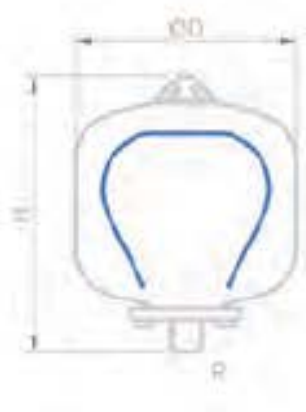

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
4,5	01015251	15 AMR	15	16	270	330	1"
5,3	01020251	20 AMR	20	16	270	425	1"
6	01025251	25 AMR	25	16	320	440	1"
13	01050251	50 AMR	50	16	360	620	1"