

## AR-A LARGE VOLUME




### Puffer tanks

#### Primary cooling systems and heat pumps

- Puffer tanks in coling systems and heat pumps. Lack internal coating, so they should not be installed in a secondary (open) system.
- Allow to reduce the number of starts / stops of the cooling unit or heat pump when quick temperature variations occur.
- Thermal insulation in flexible polyethylene foam (19 mm).
- Sleeves are protected with trims and caps
- Designed and manufactured according to 2014/68/UE Directive.

### Technical specifications

- Volume: 2000 – 5000 Liters
- Max. service pressure: 6 Bar
- Temperature max.: 100°C
- Temperature min.: -10°C
- Auxiliar connections: R - GH see below
- Water connection: R – GH see below

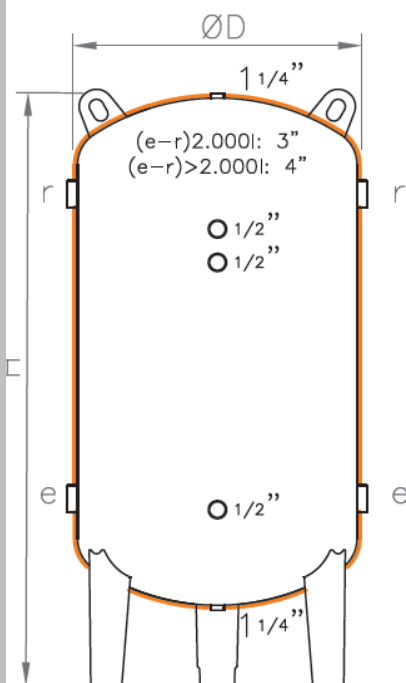

Code	Model	Volume (Liters)	Weight (Kg)	ØD (mm)	H (mm)	Water connection R (e-r)
30200061	2000 AR-A	2.000	300	1.150	2.300	4 x 3"
30300061	3000 AR-A	3.000	750	1.340	2.485	4 x 4"
30400061	4000 AR-A	4.000	970	1.440	3.000	4 x 4"
30500061	5000 AR-A	5.000	1.090	1.640	2.950	4 x 4"

Note: Optionally supplied with PVC lining for outdoor

- ef-ec Conexiones
- rf-rc Conexiones
- t Termómetro
- s Sonda
- v Desagüe
- p Purga aire