




CHB HYDRAULIC SEPARATORS FLANGED CONNECTIONS

Hydraulic separators with flanged connections. Heating and cooling systems.


- Steel body
- 4 flanged connections PN16 according EN 1092-1)
- Upper and bottom fitting R1"
- Brass air vent Purgador EN-12165 de 1" Male
- Drain valve: Cut-off valve 1"
- Side connection: 2 x 1/2" Female
- Inner Filter: Perforated stainless steel
- Max % glicol: 50%.
- Colour: Red
- Manufactured according to 2014/68/EU Directive
- 2 year warranty

Technical specifications

- Max. service pressure: 10 Bar
- Test pressure: 15 Bar
- Temperature max.: 110°C
- Temperature min.: : 0°C

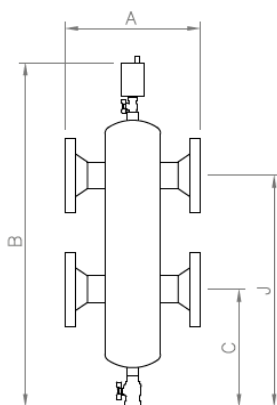

Code	Model	Volume (Lts.)	Weight (Kg)	A (mm)	B (mm)	C (mm)	J (mm)
18300050	50 CHB	15	30	400	1.050	340	690
18300065	65 CHB	15	35	400	1.050	340	690
18300080	80 CHB	65	43	530	1.210	340	790
18300100	100 CHB	65	45	530	1.210	340	790
18300125	125 CHB	85	80	670	1.400	400	960
18300150	150 CHB	88	90	670	1.400	400	960

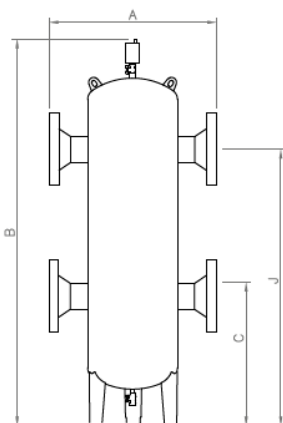

Code	Model	Volume (Lts.)	Weight (Kg)	A (mm)	B (mm)	C (mm)	J (mm)
18300200	200 CHB-P	500	230	900	2.130	575	1.575
18300250	250 CHB-P	700	325	1.100	2.240	615	1.615
18300300	300 CHB-P	900	460	1.200	2.320	670	1.670

Remark: Optional polyurethane insulation (19 mm thickness)