

DG GALVANIZED 8 BAR




Hydropneumatic tanks without bladder Booster sets

- Hydropneumatic tanks without bladder
- Material: Hot galvanized steel (inner and outer)
- Installed in combination with an injected equipment
- Multiple connections
- Manufactured according to 2014/68/EU
- 2 year warranty

Technical specifications

- Volume: 500 – 5.000 Liters
- Max. service pressure: 8 Bar
- Test pressure: 12 Bar
- Temperature max.: 60°C
- Temperature min.: -10°C
- Stainless steel water connection: R - G.H

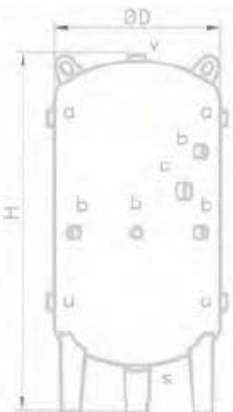

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
77	10050008	500 DG	500	8	650	1.860	Consult
119	10075008	750 DG	700	8	750	2.080	Consult
195	10100008	1000 DG	1.000	8	800	2.350	Consult
250	10125101	1250 DG	1.250	8	900	2.300	Consult
264	10150101	1500 DG	1.500	8	950	2.465	Consult
368	10200101	2000 DG	2.000	8	1.100	2.490	Consult
413	10250101	2500 DG	2.500	8	1.100	3.045	Consult
550	10300101	3000 DG	3.000	8	1.200	3.200	Consult
690	10400101	4000 DG	4.000	8	1.400	3.140	Consult
898	10500101	5000 DG	5.000	8	1.400	3.790	Consult

Accessories and spare parts

Injectors



Code	Model
61850161	INSUFLAIR 65
61850162	INSUFLAIR 300



Code	Model
61850163	INSUFLAIR 600
61850164	SURPRESS 2

Visual level



Code	Model
14500310 (*)	KIT DE NIUVEL VISUAL

(*) Kit is delivered with all necessary elements (connections and valves) for its installation. Level tuve needs to be cut at site according to different models height.

Injector selection table

Model	PRESSURE (Bar)							
	3	4	5	6	7	8	9	10
100 DG	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
200 DG	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
300 DG	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
500 DG	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
750 DG	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
1000 DG	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1250 DG	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1500 DG	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
2000 DG	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2