

PF LARGE VOLUME




Puffer tanks

Primary solar and heating systems

- Solar puffer tanks. Lack off internal coating, so they should not be installed in a secondary (open) system.
- Allow to accumulate hot water in the primary system (not suitable for hot sanitary water)
- Thermal insulation in flexible polyurethane foam, free of CFC. 80 mm thickness.
- External finish with PVC cover (grey colour).
- Sleeves are protected with trims and caps
- Designed and manufactured according to 2014/68/UE Directive.

Technical specifications

- Volume: 2.000 – 5.000 Liters
- Max. service pressure: 6 Bar
- Temperature max.: 100°C
- Temperature min.: 0°C
- Auxiliar connections: R - GH see below
- Water connection: R – GH see below

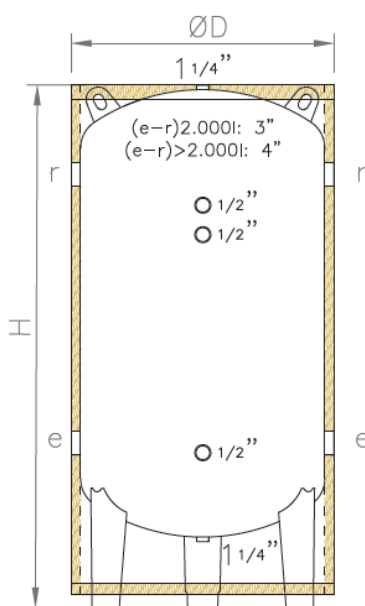

Code	Model	Volume (Liters)	Weight (Kg)	ØD (mm)	H (mm)	Water connection R (e-r)
16200061	2000 PF	2.000	300	1.260	2.350	4 x 3"
16300061	3000 PF	3.000	750	1.460	2.540	4 x 4"
16400061	4000 PF	4.000	970	1.560	3.050	4 x 4"
16500061	5000 PF	5.000	1.090	1.760	3.000	4 x 4"

