

SLB DIRT SEPARATORS WITH FLANGE


Dirt separators Heating, solar and cooling systems

- Designed to eliminate dirt particles in heating systems with minimum load losses
- AUTO operation
- Steel body and stainless steel internal reflectors for air bubbles removal
- R 1" GH bottom drain valve
- 1/2" Top fitting
- Red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



Technical specifications

- | | |
|--------------------------|-----------|
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Water connection: | see below |

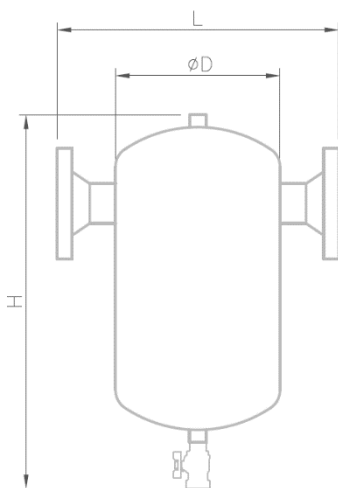

Weight (Kg)	Code	Model	Connection	L (mm)	ØD (mm)	H (mm)
20	18100050B	SLB-50	DN50 PN16	350	168	620
21	18100065B	SLB-65	DN65 PN16	350	168	620
36	18100080B	SLB-80	DN80 PN16	470	270	645
38	18100100B	SLB-100	DN100 PN16	470	270	645
73	18100125B	SLB-125	DN125 PN16	635	360	780
78	18100150B	SLB-150	DN150 PN16	635	360	780
135	18100200B	SLB-200	DN200 PN16	780	400	890
241	18100250B	SLB-250	DN250 PN16	880	485	995
282	18100300B	SLB-300	DN300 PN16	1.005	600	1.490