

VI VERTICAL


Intermediate vessels

Closed heating, cooling and solar Energy systems

- Installation is recommended when the return temperature of the system exceeds 70°C (heating), 100°C (solar systems) or below 0°C (cooling)
- Avoid deterioration of the expansion vessel bladder due to the high or low temperature
- Max. service pressure: 10 Bar
- External white epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty

Technical specifications

- Max. service pressure: 10 Bar
- Test pressure: 15 Bar
- Temperature max.: 100°C
- Temperature mín.: -10°C
- Water connection: 2 x R 1" G.M. / 2 x 1 1/2" G.M.

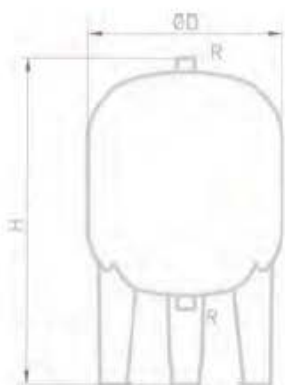

Code	Model	Volume (Liters)	Weight (Kg)	ØD (mm)	H (mm)	Water connection R
02035103	35 VI-P	35	7	360	615	2 x 1"
02050103	50 VI-P	50	12	360	750	2 x 1"
02100103	100 VI-P	100	18	450	850	2 x 1"
02200103	200 VI-P	200	39	550	1.135	2 x 1 1/2"
02300103	300 VI-P	300	52	650	1.180	2 x 1 1/2"