

AMR-PLUS STAINLESS STEEL WITHOUT FEET




Hydropneumatic tanks with replaceable bladder Booster sets

- Hydropneumatic tanks specially designed for booster sets
- Material: Steel
- Replaceable bladder according to EN 13831, suitable for drinking water
- Screwed flange-water connection in stainless steel (R 1")
- Precharge valve
- Gas (precharge): Nitrogen
- Blue epoxy powder coating RAL-5012, specially for outdoor
- Manufactured according to 2014/68/EU Directive
- 5 year warranty



Technical specifications

- | | |
|------------------------------------|---------------|
| ▪ Volume: | 5 – 50 Liters |
| ▪ Bladder: | Replaceable |
| ▪ Max. service pressure: | 8-10 Bar |
| ▪ Test pressure: | 12-15 Bar |
| ▪ Precharge EXWORKS: | 3 Bar |
| ▪ Temperature máx.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Screwed flange-water connection: | R 1" G.M |

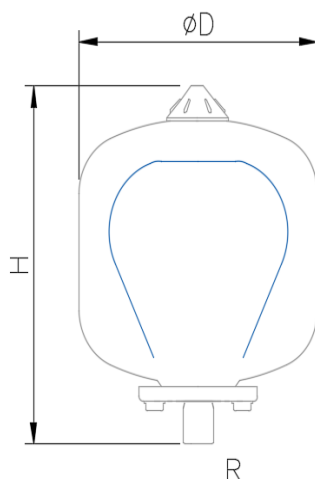

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
2	06100510	5 AMR-PLUS INOX	5	10	200	250	1"
2,5	06100810	8 AMR-PLUS INOX	8	10	200	340	1"
3,2	06101210	12 AMR-PLUS INOX	12	10	270	310	1"
4	06102010	20 AMR-PLUS INOX	20	10	270	415	1"
5,6	06102410	24 AMR-PLUS INOX	24	8	270	470	1"
5,6	06102510	25 AMR-PLUS INOX	25	10	320	430	1"
7	06103510	35 AMR-PLUS INOX	35	10	360	475	1"
10	06105010	50 AMR-PLUS INOX	50	10	360	620	1"