

AHN WITHOUT FEET




Surge vessels with bladder

- Reduce to admissible values overpressures and underpressure waves along the pipes
- Material: Steel
- Replaceable bladder suitable for drinking and waste water
- Water connection: Threaded or flanged (EN 1092-1). See models
- Inflate valve
- Precharge gas: Air
- External red epoxy powder coating
- Manufactured according to 2014/68/UE Directive
- 2 year warranty



Technical specifications

▪ Volume:	25 – 350 Liters
▪ Bladder:	Replaceable
▪ Max. service pressure:	20 – 25 - 30 Bar
▪ Precharge EXWORKS:	0,5 Bar
▪ Temperature max.:	100°C
▪ Temperature min.:	-10°C
▪ Water connection:	R3” – DN100

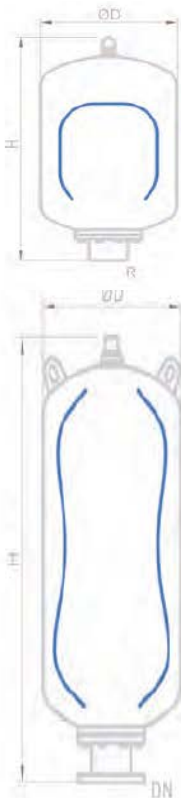

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R/DN
14,5	07025200	25 AHN	25	20	270	550	3"
29,5	07050200	50 AHN	50	20	360	675	3"
82	07100200	100 AHN	100	20	320	1.790	DN100
223	07200200	200 AHN	200	20	400	1.950	DN100
313	07350200	350 AHN	350	20	500	2.140	DN100
43	07050250	50 AHN	50	25	360	675	3"
204	07100250	100 AHN	100	25	320	1.790	DN100
274	07200250	200 AHN	200	25	400	1.950	DN100
371	07350200	350 AHN	350	25	500	2.140	DN100
80	07050300	50 AHN	50	30	360	675	3"
204	07100300	100 AHN	100	30	320	1.790	DN100
291	07200300	200 AHN	200	30	400	1.950	DN100
394	07350300	350 AHN	350	30	500	2.140	DN100