


Hydropneumatic tanks without bladder Booster sets

- Hydropneumatic tanks without bladder
- Material: Stainless steel
- Installed in combination with an injected equipment
- Multiple connections
- Sandblasted finish
- Manufactured according to 2014/68/EU
- 2 year warranty

Technical specifications

- Volume: 100 – 1.000 Liters
- Max. service pressure: 10 Bar
- Test pressure: 15 Bar
- Temperature max.: 100°C
- Temperature min.: -10°C
- Stainless steel water connection: R - G.H

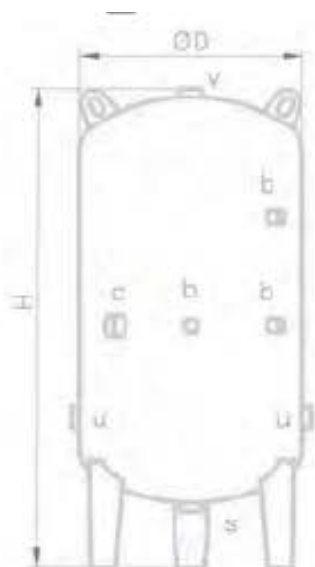

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
32	17010330 G	100 DX	100	10	400	1.000	Consult
46	17020330 G	200 DX	200	10	550	1.125	Consult
71	17030330 G	300 DX	300	10	550	1.535	Consult
82	17040330 G	400 DX	400	10	550	1.935	Consult
105	17050330 G	500 DX	500	10	650	1.810	Consult
141	17060330 G	600 DX	600	10	650	2.110	Consult
190	17075330 G	750 DX	700	10	750	2.005	Consult
270	17100330 G	1000 DX	1.000	10	800	2.310	Consult

Accessories and spare parts

Injectors



Code	Model
61850161	INSUFLAIR 65
61850162	INSUFLAIR 300



Code	Model
61850163	INSUFLAIR 600
61850164	SURPRESS 2

Visual level



Code	Model
14500310 (*)	KIT DE NIUVEL VISUAL

(*) Kit is delivered with all necessary elements (connections and valves) for its installation. Level tuve needs to be cut at site according to different models height.

Injector selection table

Model	PRESSURE (Bar)							
	3	4	5	6	7	8	9	10
100 DX	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
200 DX	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
300 DX	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
500 DX	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
750 DX	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
1000 DX	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1250 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1500 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
2000 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2