


Hydropneumatic tanks without bladder Booster sets

- Hydropneumatic tanks without bladder
- Material: Stainless steel
- Installed in combination with an injected equipment
- Multiple connections
- Industrial finish
- Manufactured according to 2014/68/EU
- 2 year warranty

Technical specifications

- | | |
|-------------------------------------|--------------------|
| ▪ Volume: | 100 – 5.000 Liters |
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Temperature max.: | 100°C |
| ▪ Temperature min.: | -10°C |
| ▪ Stainless steel water connection: | R - G.H |

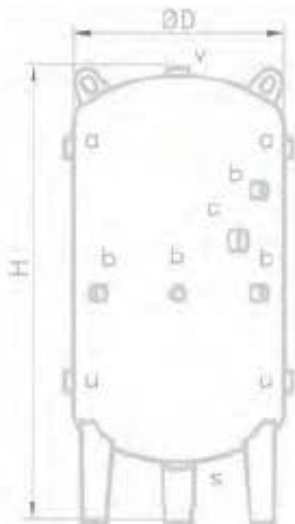

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
343	17150330	1500 DX	1.500	10	950	2.535	Consult
490	17200330	2000 DX	2.000	10	1.100	2.490	Consult
870	17400330	4000 DX	4.000	10	1.400	3.080	Consult
1.090	17500330	5000 DX	5.000	10	1.400	3.755	Consult

Accessories and spare parts

Injectors



Code	Model
61850161	INSUFLAIR 65
61850162	INSUFLAIR 300



Code	Model
61850163	INSUFLAIR 600
61850164	SURPRESS 2

Visual level



Code	Model
14500310 (*)	KIT DE NIUVEL VISUAL

(*) Kit is delivered with all necessary elements (connections and valves) for its installation. Level tuve needs to be cut at site according to different models height.

Injector selection table

Model	PRESSURE (Bar)							
	3	4	5	6	7	8	9	10
100 DX	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
200 DX	INSUFLAIR 65	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
300 DX	INSUFLAIR 65	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
500 DX	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
750 DX	INSUFLAIR 300	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600
1000 DX	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	INSUFLAIR 600	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1250 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
1500 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2
2000 DX	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2	SURPRESS 2