

AMR-PLUS VERTICAL




Hydropneumatic tanks with bladder Booster sets

- Hydropneumatic tanks specially designed for booster sets
- Material: Steel
- Replaceable bladder according to EN 13831, suitable for drinking water
- Brass water connection (R 1 1/2")
- Upper flange with threaded connection (R 1" GM)
- Precharge valve
- Gas (precharge): Nitrogen
- External blue epoxy powder coating RAL-5012, specially for outdoor
- Manufactured according to 2014/68/EU Directive
- 5 year warranty

Technical specifications

- | | |
|---|-------------------|
| ▪ Volume: | 80 – 1.000 Liters |
| ▪ Bladder: | Replaceable |
| ▪ Max. service pressure: | 10 Bar |
| ▪ Test pressure: | 15 Bar |
| ▪ Precharge EXWORKS: | 3 Bar |
| ▪ Temperature máx.: | 100°C |
| ▪ Temperature mín.: | -10°C |
| ▪ Botton brass water connection: | R 1 1/2" G.M. |
| ▪ Upper coated flange with threaded connection: | R 1" G.M. |

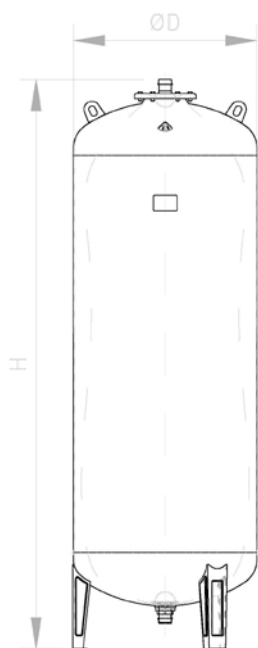

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
24	01080115	80 AMR-PLUS	80	10	485	690	1 1/2"
26	01100115	100 AMR-PLUS	100	10	485	805	1 1/2"
38	03150031	150 AMR-PLUS	150	10	485	1.155	1 1/2"
49	03220031	220 AMR-PLUS	200	10	485	1.400	1 1/2"
60	03350031	350 AMR-PLUS	300	10	485	1.965	1 1/2"
90	03500031	500 AMR-PLUS	500	10	600	2.065	1 1/2"
158	03700031	700 AMR-PLUS	700	10	700	2.145	1 1/2"
224	03900311	900 AMR-PLUS	900	10	800	2.155	1 1/2"
274	03910033	1000 AMR-PLUS	1.000	10	800	2.375	1 1/2"