

## CMF WITHOUT FEET




### Fixed membrane expansion vessels Cooling and heating closed systems

- Fixed membrane expansion vessel for cooling and heating systems.
- Material: Steel
- Non-replaceable membrane, according to EN 13831 (non potable)
- Galvanized water connection (R 3/4")
- Precharge valve
- Gas precharge: Air
- External red epoxy powder coating
- Manufactured according to 2014/68/EU Directive
- 2 year warranty



#### Technical specifications

- |                          |                 |
|--------------------------|-----------------|
| ▪ Volume:                | 5 – 35 Liters   |
| ▪ Membrane:              | Non-replaceable |
| ▪ Max. service pressure: | 5 Bar           |
| ▪ Test pressure:         | 7,5 Bar         |
| ▪ Precharge EXWORKS:     | 1,5Bar          |
| ▪ Temperature max.:      | 100°C           |
| ▪ Temperature mín.:      | -10°C           |
| ▪ Water connection:      | R 3/4" G.M      |

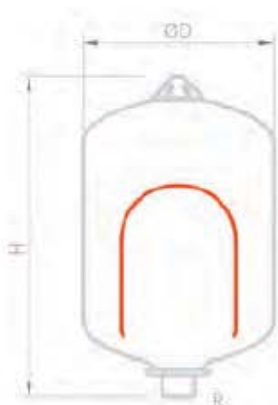

Weight (Kg)	Code	Model	Volume (Lts.)	Pressure (Bar)	ØD (mm)	H (mm)	Water connection R
2	02005343	5 CMF	5	5	200	250	3/4"
2,5	02008343	8 CMF	8	5	200	340	3/4"
3,2	02012343	12 CMF	12	5	270	310	3/4"
4	02018343	18 CMF	18	5	270	415	3/4"
4,5	02025343	25 CMF	25	5	320	430	3/4"
7	02035343	35 CMF	35	5	360	475	3/4"